

# Specifications




MODELS GS™-1930		
MEASUREMENTS	Metric	US
Working height maximum*	7.79 m	25 ft
<b>A</b> Platform height maximum	5.79 m	19 ft
<b>B</b> Platform height stowed	1.00 m	3 ft 3.5 in
<b>C</b> Platform length - outside	1.63 m	5 ft 4 in
extended	2.54 m	8 ft 4 in
Slide-out platform extension deck	0.91 m	3 ft
<b>D</b> Platform width -outside	0.74 m	2 ft 5 in
Guardrail height: fixed rails	0.99 m	3 ft 3 in
fold down	1.10 m	3 ft 7 in
Toeboard height	0.15 m	6 in
<b>E</b> Height -stowed: fixed rails	2.00 m	6 ft 7 in
folding guardrails	2.11 m	6 ft 11 in
rails folded	1.75 m	5 ft 9 in
<b>F</b> Length -stowed	1.83 m	6 ft
Length -stowed extended	2.74 m	9 ft
<b>G</b> Width	0.76 m	2 ft 6 in
<b>H</b> Wheelbase	1.32 m	4 ft 4 in
<b>I</b> Ground clearance - centre	0.06 m	2.4 in
<b>J</b> - with pothole guards deployed	0.02 m	0.75 in

PRODUCTIVITY		
Maximum platform occupancy** (indoor use only)	2	2
Lift capacity	227 kg	500 lbs
Lift capacity - extension deck	113 kg	250 lbs
Drive speed - stowed	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph
Gradeability - stowed***	30%	30%
Turning radius - inside	zero	zero
Turning radius - outside	1.55 m	5 ft 1 in
Raise / lower speed	16 / 25 sec	16 / 25 sec
Controls	proportional	
Drive	dual front wheel	
Multiple disc brakes	dual rear wheel	
Tyres - solid non-marking	30 x 11 x 20 cm	12 x 4.5 x 8 in

POWER		
Power source	24 V DC (four 6V 225 Ah batteries)	
Hydraulic system capacity	14.2 L	3.75 gal

WEIGHT****		
	1,498 kg	3,302 lbs

STANDARDS COMPLIANCE	ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10
----------------------	---

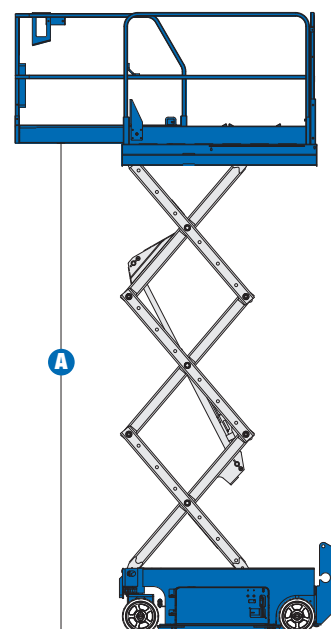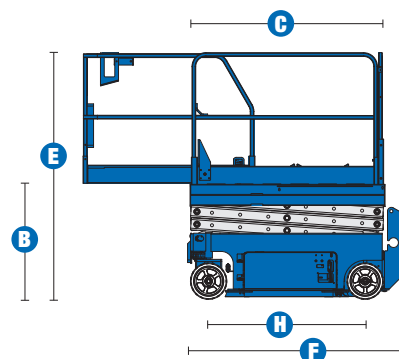

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* CE/AUS markets: GS-1930 are indoor use only—2 person maximum occupancy.

GS-1532 and GS-1932 are indoor/outdoor use—1 person maximum.

\*\*\* Gradeability applies to driving on slopes, see operator's manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.

## Features

### STANDARD FEATURES

#### MEASUREMENTS

##### GS™-1930

- 7.79 m (25 ft) working height
- Up to 227 kg (500 lbs) lift capacity

#### PRODUCTIVITY

- 1.63 m x 0.74 m (5 ft 4 in x 2 ft 5 in) steel platform
- Folding rails with half-height swing gate
- 0.91 m (3 ft) extension deck
- Dual front wheel drive
- Proportional lift and drive
- 30% gradeability
- Platform control with battery charge indicator and diagnostic display
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Brake release
- Solid non-marking tyres
- Pothole guards
- Tilt alarm
- Descent alarm
- Electronic horn
- Hour meter
- Dual flashing beacons
- Motion alarm

#### POWER

- 24 V DC (four 6 V 225 Ah batteries)
- Universal 20 amp smart charger

### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Folding rails with half-height swing gate
- Platform swing gate, half-height
- Air line to platform
- Platform work lights
- Panel mounted, recessed charger receptacle
- Automotive horn

#### POWER OPTIONS

- Maintenance-free batteries
- E E Rating
- 240 V power to platform



### Genie Australia – Toll free number 1800 788 633

**Brisbane (Head Office)**  
33 Kimberley Street  
Darra QLD 4076

**Sydney**  
74 Glendenning Road  
Glendenning NSW 2761

**Melbourne**  
374 Hammond Road  
Dandenong VIC 3175

**Perth**  
83 Bannister Road  
Canning Vale WA 6155

### Genie United States

### Distributed by:

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington  
98073-9730

Effective Date: April, 2009. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries and all rights are reserved. Terex is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie is a Registered Trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Company. © 2009 Terex Corporation.

GS-1930 090327 Ver1

[www.genieindustries.com](http://www.genieindustries.com)